


**MANUFACTURE OF HOLLOW YARN MEMBRANE MODULE**

**Publication number:** JP61097005  
**Publication date:** 1986-05-15  
**Inventor:** TAKEMURA TORU; YOSHIDA HARUHIKO; MUKAI TAKUMA  
**Applicant:** MITSUBISHI RAYON CO  
**Classification:**  
- **International:** B01D63/02; B01D63/02; (IPC1-7): B01D13/01  
- **European:**  
**Application number:** JP19840217259 19841018  
**Priority number(s):** JP19840217259 19841018

[Report a data error here](#)**Abstract of JP61097005**

**PURPOSE:** To distribute uniformly hollow yarn membranes in a supporting member by heat-treating the part of the hollow yarn membrane to be fixed at the temp. corresponding to the m.p. for the membrane before a raw material resin of a fixing member is injected between porous hollow yarn membrane and cured and preventing the intrusion of the resin into the hollow part of the hollow yarn membrane. **CONSTITUTION:** At least a part of the part of a hollow yarn membrane 3 fixed by a fixing member 2 is heat-treated at the temp. ranging from the temp. 10 deg.C lower than the m.p. of the membrane 3 to the temp. 30 deg.C higher than the m.p. to close the fine pores of the membrane 3 by thermal deformation. After the heat treatment, a hollow yarn membrane module is manufactured by the conventional manufacturing process of the module. Consequently, the intrusion of a raw material resin of a liq. fixing member into the hollow part of the membrane 3 through the fine pores of the wall of the membrane 3 can be prevented when the hollow yarn membrane 3 is fixed in the supporting member 1.

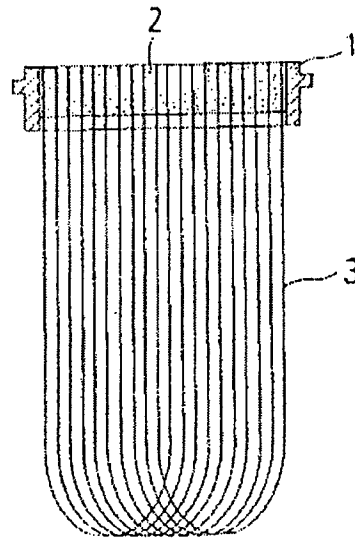

---

Data supplied from the esp@cenet database - Worldwide